Previous

G.R.S. IX—5]

Previous references.

1922.

(210)

File No. 42-22

Serial Nos. 15 & 16.

Later references.

GENERAL AND REVENUE SECRETARIAT.

Serial Nos.

Part B for May 23

SUBJECT

Estimate for metalling the Arasikere-Hulijar Road in the Hassan District

---

16 30, The Chief Engineer for Roads & Buildings, the Comptroller & the President, District Bd Hassan (through the D.C. Hassan)

No 7623-25/d 18.5.23

Sanctions the estimate

HS 30/5/23

Printed on the Multigraph.

36511

WD 1378—GPB—5,000—25-1-22

No. 54978

1 Estimate
1 Report
2

MYSORE PUBLIC WORKS DEPARTMENT,
CENTRAL OFFICE,
Dated Bangalore 4th April 1923.

5 - APR 1923

FROM H. D. Rice, Esq.,
~~XXCADAMBIXEsq.~~,
Chief Engineer of Mysore, Bangalore.

To for Roads and Buildings, Bangalore.

The Secretary to Government,
Revenue Department, Bangalore.

SIR,

I have the honour to forward herewith for favour of early sanction, an estimate amounting to Rs.20,000/- for metalling the Arsikere-Huliyar Road in the Hassan District.

2. The necessity for the work and the provisions made in the estimate are explained by the Executive Engineer in his report.

3. The President, District Board, Hassan, has countersigned the estimate in token of his approval thereto.

4. It is reported that there is a provision of Rs.7,000/- for the work in the District Fund Budget Estimate of the Hassan District for the year 1922-23, and as the District Board are anxious that the allotment for the year should be worked out in full before the close of the official year, the Executive Engineer, Hassan ~~District~~ Division, has been authorized to start the collection of metal pending formal sanction to the estimate.

I have the honour to be,
Sir,
Your most obedient servant,

Chief Engineer of Mysore
for Roads and Buildings.

Report to accompany the estimate for metalling Arsikere Huliyar Road

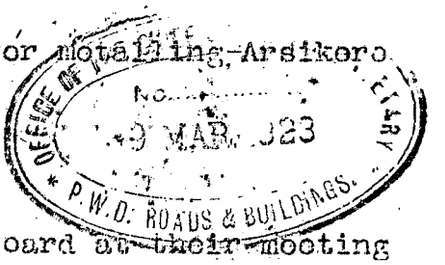

Reference:- Resolution of the District Board at their meeting held on 30th November 1922.

Arsikere Huliyar Road which is 21 miles in length including the branch to Tirupati is a purely gravelled road with a few furlong metalled here and there. It commences from 1/106 of Bangalore Honnawara Road in Arsikere town and joins Banawar Sira Road in the 19th mile.

The present condition of the road with an allotment of only Rs 60/ per mile is far from satisfactory though several furlongs dealt with recently are good. Due to very heavy traffice on the road, the non-availability of good gravel in many places, the black cotton soil through which the road in some places runs and the - - loosenoss of the subsoil, the surface has been deeply tracked and is full of deep and dangerous pits for the greater portion of its - - length. The allotment has now been increased to Rs 150/ per mile as sanctioned in the District Fund Budget for 1922-23. Even with this allotment it will not be possible to maintain the road in an efficient condition until the entire length is metalled.

During the last two years an attempt has been made to metal the bad portions of the road under special repair estimate san ctioned for Rs 3000 and odd. The whole of the first mile has been metalled and a few furlongs in the 2nd mile. Collection made last y for 14 furlongs under a special repair estimate for Rs 1083 has - - been consolidated during the year and the cost of this has been included in the present estimate.

The present provides for metalling 105 furlongs as detailed which run through black cotton soil and become almost intrafficable - - especially during the rainy season . As a number of carts pass - on the road particularly on the weekly market or shandy days at Arsikere and the soil is bad, it is proposed to put a first coat

G.R.S. VI G 34]

SUBJECT..

Diary No. of letter replied to.... 5166

Section LR.
File No. 42 22
Serial No. 16

General and Revenue Secretariat

Proceedings of the Government of His Highness the Maharaja of Mysore

the 1st

Date of issue.. 18/5/23

Signed by.....

Read—

Letter No. B 4878 of 6.2.23 from the Chief Engr for Roads & Buildings submitting for sanction an estimate amounting to Rs 20000 for metalling the Arsikere-Hulikal Road in the Hassan Dt stating that it is reported that there is a provision of Rs 7000/- for the work in the Dt fund Budget Estimate

Order Thereon—No.

of the Hassan Dt for the year 1923-24 Cr 6423-24 Rup Estimate

The estimate is sanctioned

May this be

i Printed'?

ii treated as a standing order ?

iii published in the Gazette, English Part ?

iv translated ?

v placed at the disposal of the press ?

vi published in the Gazette, Kannada Part ?

17/5/23

17.4.23 Dewan

To the Chief Engr for Rds & Buildings returning the estimate

Copy to President Dt Bd Hassan Dist

D.C. Hassan Dt.